





Contents

<b>1</b>	<b>HARDWARE AND OPERATION MODE INSTRUCTION.....</b>	<b>4</b>
1.1	LED INDICATOR: .....	4
1.2	AP INTERFACE: .....	4
1.3	POWER SUPPLY: .....	4
<b>1.3.1</b>	<b>PoE Adapter Power Supply:.....</b>	<b>4</b>
<b>1.3.2</b>	<b>Powered by PoE Switch .....</b>	<b>5</b>
<b>1.3.3</b>	<b>Operation Mode: .....</b>	<b>5</b>
<b>1.3.4</b>	<b>Connect Wireless AP with PC: .....</b>	<b>6</b>
1.4	LOGIN.....	6
<b>1.4.1</b>	<b>Default settings .....</b>	<b>6</b>
	<b>WEB GUI INTERFACE SETTING:.....</b>	<b>9</b>
2.1	STATUS .....	9
2.2	WIZARD CONFIGURATION: .....	12
<b>2.2.1</b>	<b>Gateway Mode:.....</b>	<b>12</b>
<b>2.2.2</b>	<b>WiFi Repeater mode.....</b>	<b>15</b>
2.3	WISP OPERATION MODE: .....	17
2.4	AP OPERATION MODE: .....	19
2.5	ADVANCED SETTING: .....	21
<b>2.5.1</b>	<b>Turn off LEDs .....</b>	<b>23</b>
<b>2.5.2</b>	<b>2.4G Wireless Setting: .....</b>	<b>24</b>
<b>2.5.3</b>	<b>Virtual AP: .....</b>	<b>25</b>
<b>2.5.4</b>	<b>2.4G Access Control: .....</b>	<b>26</b>
<b>2.5.5</b>	<b>2.4G Advanced Settings: .....</b>	<b>26</b>
<b>2.5.6</b>	<b>5.8G Wireless Setting: .....</b>	<b>27</b>
<b>2.5.7</b>	<b>Network setting: .....</b>	<b>28</b>
<b>3</b>	<b>SHARE INTERNET AND OBTAIN IP ADDRESS AUTOMATICALLY .....</b>	<b>31</b>
3.1	TROUBLE SHOOTING: .....	32


## 1 Hardware and Operation mode Instruction

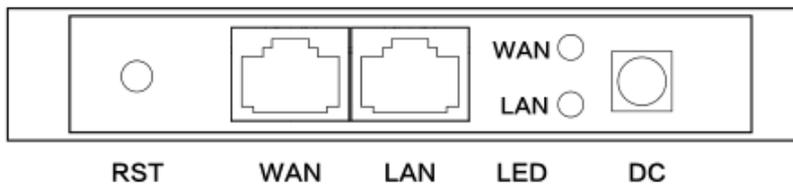

### 1.3.1 PoE Adapter Power Supply:

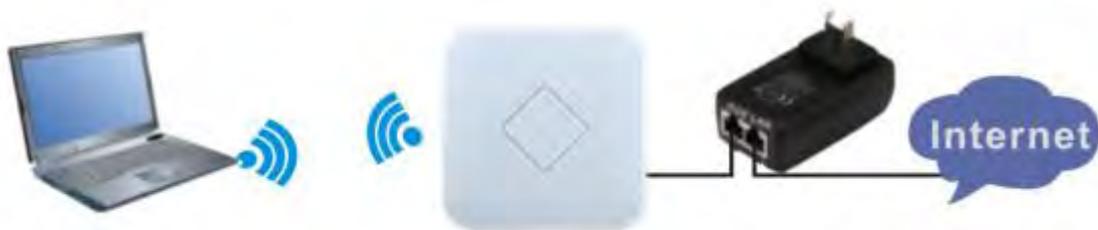


### 1.3.2 Powered by PoE Switch

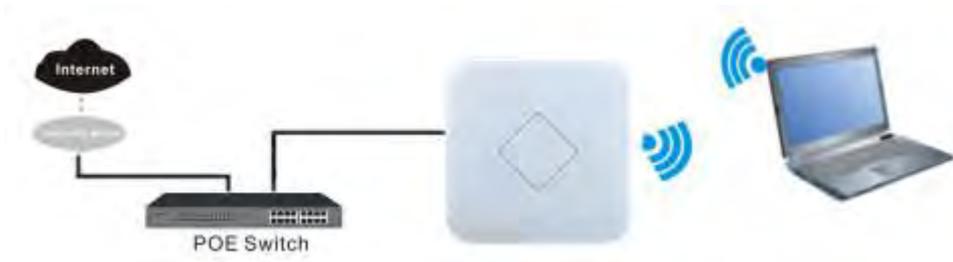

### 1.3.3 Operation Mode:

1. Wireless AP: Plug and Play to transmit Wireless signal for wireless end users from wired networking

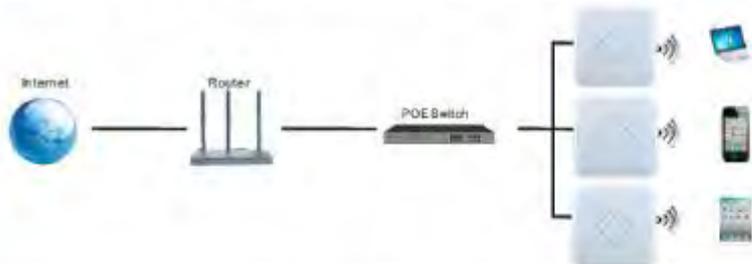



2. Wireless Repeater: Wireless receive and transmit, to extend the existing wireless networking for more range.



3. Gateway: Supply WAN connection from DSL, Cable Modem or broadband mobile phone network through PPPoE, Static IP, Dynamic IP




### 1.3.4 Connect Wireless AP with PC:

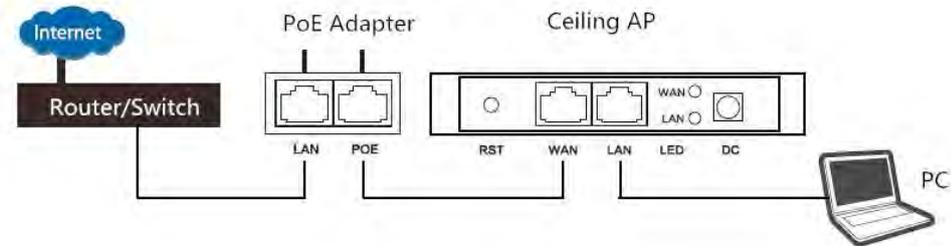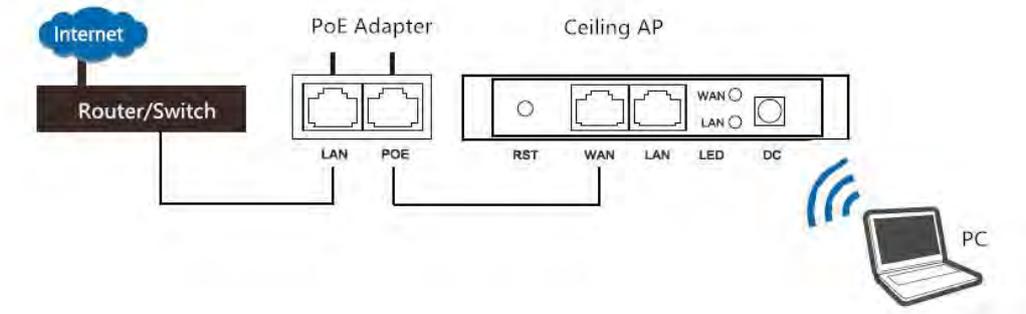

### 1.4.1 Default settings

)

)

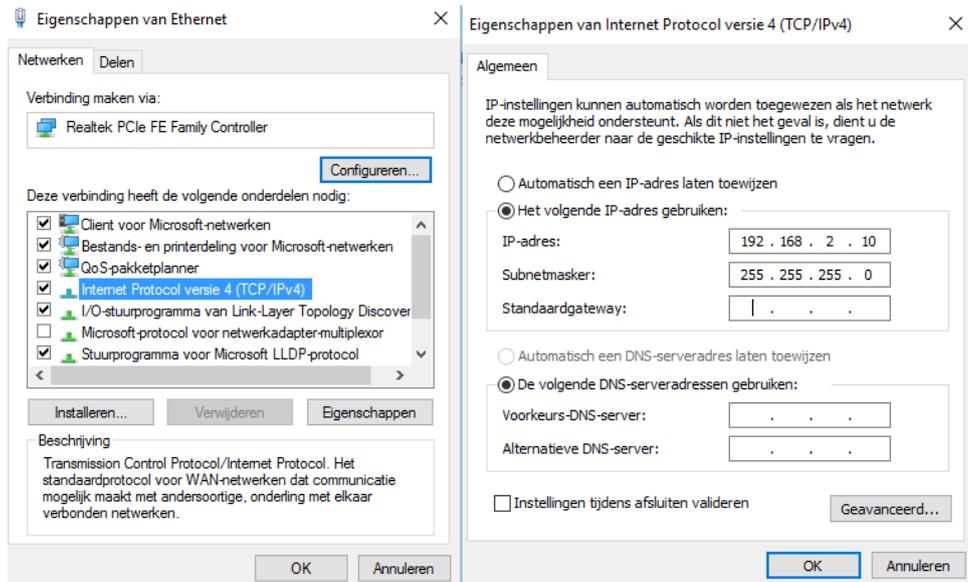



HIGH PERFORMANCE INTELLIGENT WIRELESS ROUTER/AP





## WEB GUI interface Setting:

The screenshot displays the Niveon Professional WEB GUI interface. At the top, there is a navigation bar with 'Welcome User', 'Status', 'Wizard', 'Advanced', and 'Exit' menus. A language selector shows '简体中文' and 'English'. Below the navigation bar, the main status area includes 'Mode AP Mode', 'channel auto', 'channel 153', and a 'Reboot' button. A central diagram illustrates the network topology: 'User' (represented by a laptop and smartphone) connected to an 'AP' (Access Point) which is connected to a 'Switch'. The AP is labeled with '2.4' and '5.8' frequencies. Below the diagram, the 'Running time' is shown as '2M14S' and the 'Software Version' is 'XD3200-AP-V2.0-Build20151204174952'. The bottom section contains four main configuration panels: '2.4G Wireless setting' (WirelessAP-2G-00, MAC: 78:D3:8D:D3:B5:18), '5.8G Wireless setting' (WirelessAP-5G-10, MAC: 78:D3:8D:D3:B5:19), 'LAN setting' (IP: 192.168.188.253, MAC: 78:D3:8D:D3:B5:17), and 'AP position setting' (represented by a location pin icon).

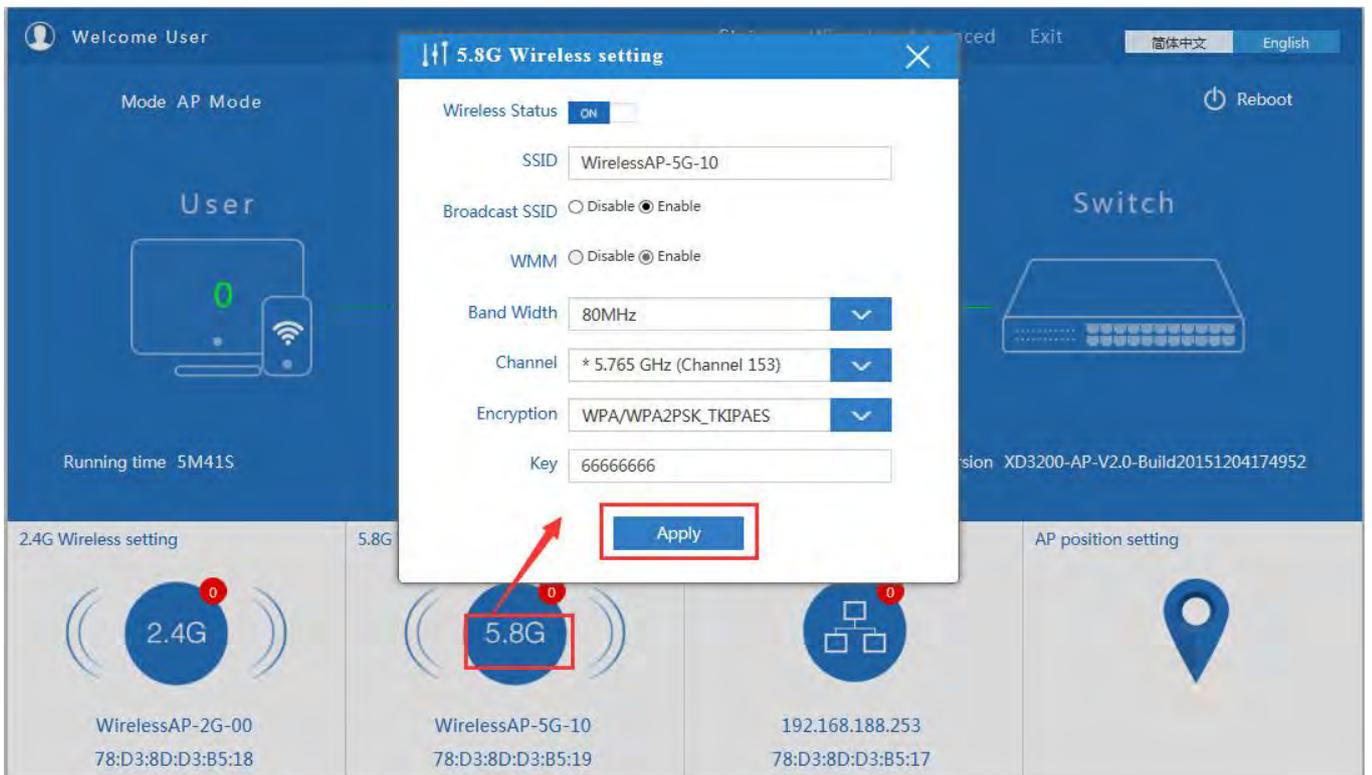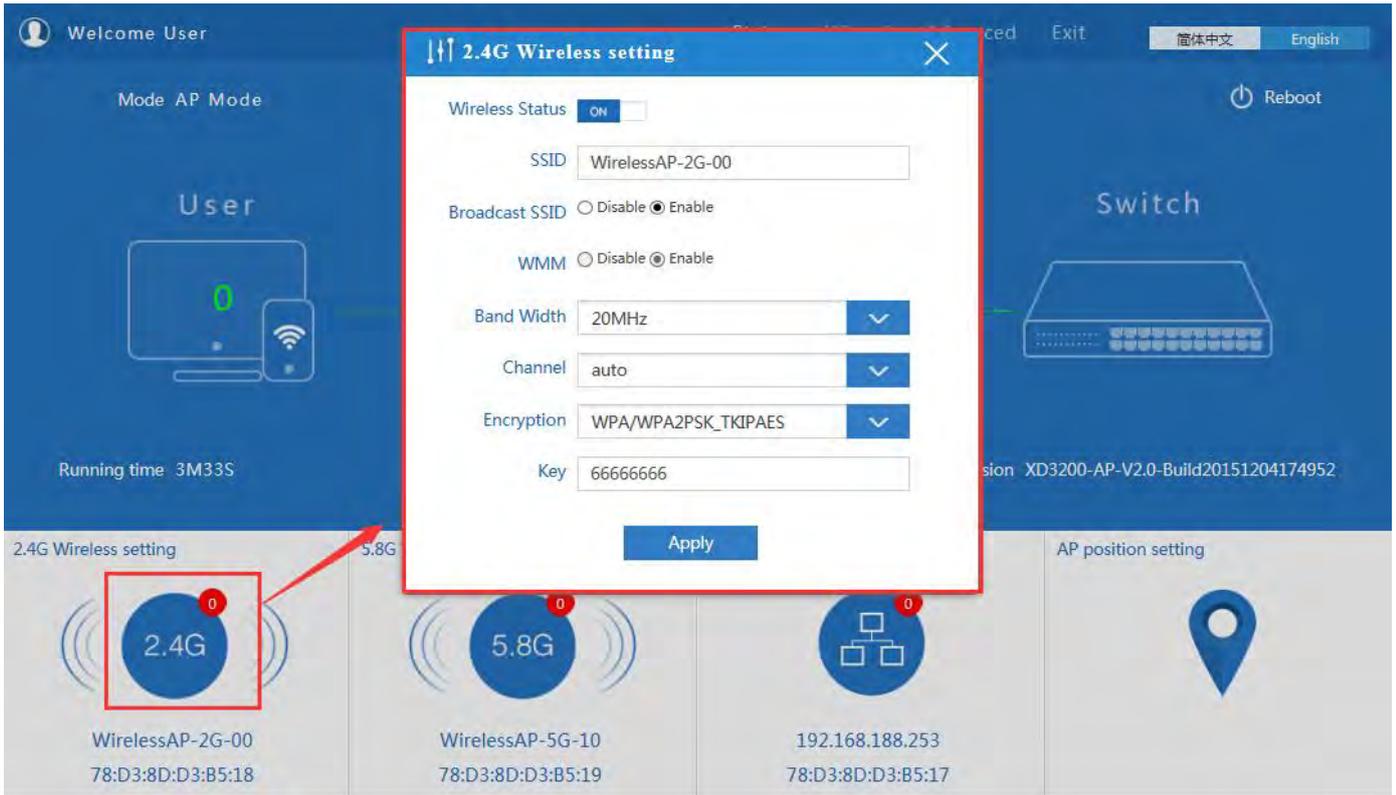

The screenshot displays the Niveon Professional web interface. At the top, it says "Welcome User" and "Mode AP Mode". A "LAN setting" dialog box is open, showing "Access Type" with "Static IP" and "DHCP" options. The "DHCP" option is selected. An "Apply" button is visible. Below the dialog, there is a diagram showing a "User" (laptop and phone) connected to a central device, which is connected to a "Switch". The interface also shows "Running time 6M34S" and "Software Version XD3200-AP-V2.0-Build20151204174952". At the bottom, there are four main settings cards: "2.4G Wireless setting" (WirelessAP-2G-00, MAC: 78:D3:8D:D3:B5:18), "5.8G Wireless setting" (WirelessAP-5G-10, MAC: 78:D3:8D:D3:B5:19), "LAN setting" (IP: 192.168.188.253, MAC: 78:D3:8D:D3:B5:17), and "AP position setting". The "LAN setting" card is highlighted with a red box, and a red arrow points from the "LAN setting" dialog box to it.

The screenshot displays the Niveon Professional web interface. At the top, it says "Welcome User" and "Mode AP Mode". A "Location Information" dialog box is open, showing "AP Location" set to "Right on the first floor" and "AP Name" set to "AP1". An "Apply" button is visible. Below the dialog, there is a diagram showing a "User" (laptop and phone) connected to a central device, which is connected to a "Switch". The interface also shows "Running time 7M51S" and "Software Version XD3200-AP-V2.0-Build20151204174952". At the bottom, there are four main settings cards: "2.4G Wireless setting" (WirelessAP-2G-00, MAC: 78:D3:8D:D3:B5:18), "5.8G Wireless setting" (WirelessAP-5G-10, MAC: 78:D3:8D:D3:B5:19), "LAN setting" (IP: 192.168.188.253, MAC: 78:D3:8D:D3:B5:17), and "AP position setting". The "AP position setting" card is highlighted with a red box, and a red arrow points from the "Location Information" dialog box to it.

**Choose Operation Mode** Return to Status page

Choose the mode you want to configure

 **Gateway Mode**

 **Repeater Mode**

 **WISP Mode**

 **AP Mode**

[Explanation on each operation mode](#)

In this mode, the AP wireless interface and cable interface bridging together. Without NAT, firewall and all network related functions.

### 2.2.1 Gateway Mode:

**Gateway Mode**

First: WAN Settings    Second: Wireless    Third: Complete    1st

Static IP    PPPOE(ADSL)    DHCP    2nd

The current access mode is DHCP, Please click next to configure.

Back    Next    3rd



**Gateway Mode**

First: WAN Settings    **Second: Wireless**    Third: Complete



Wireless Settings 2.4G/5.8G

<b>2.4G Wireless Settings</b> 1st	<b>5.8G Wireless Settings</b> 2nd
2.4GHz WLAN Status <input checked="" type="checkbox"/> ON    2G wireless analyzer	5.8GHz WLAN Status <input checked="" type="checkbox"/> ON    5G wireless analyzer
SSID: WirelessAP-2G-00	SSID: WirelessAP-5G-10
Channel: auto	Channel: * 5.765 GHz (Channel 153)
Encryption: WPA/WPA2PSK_TKIPAES	Encryption: WPA/WPA2PSK_TKIPAES
Key: 66666666	Key: 66666666

Back    Next    3rd

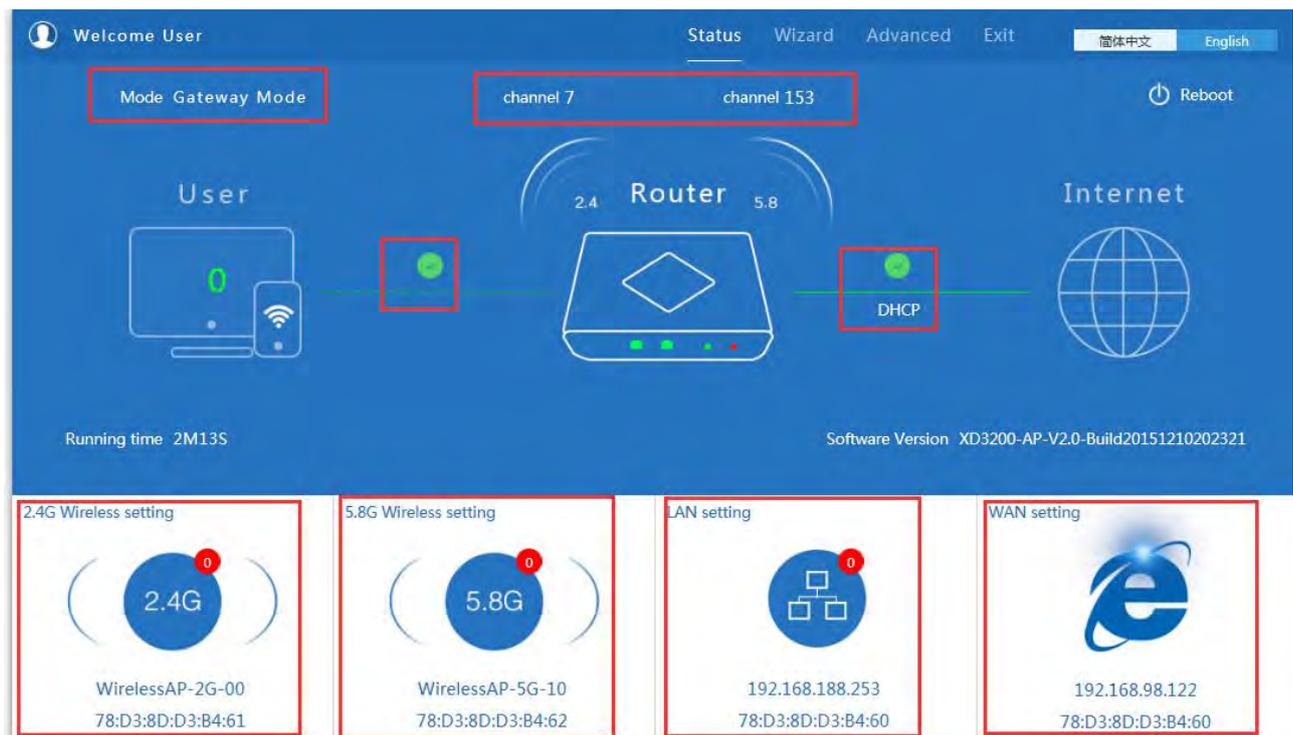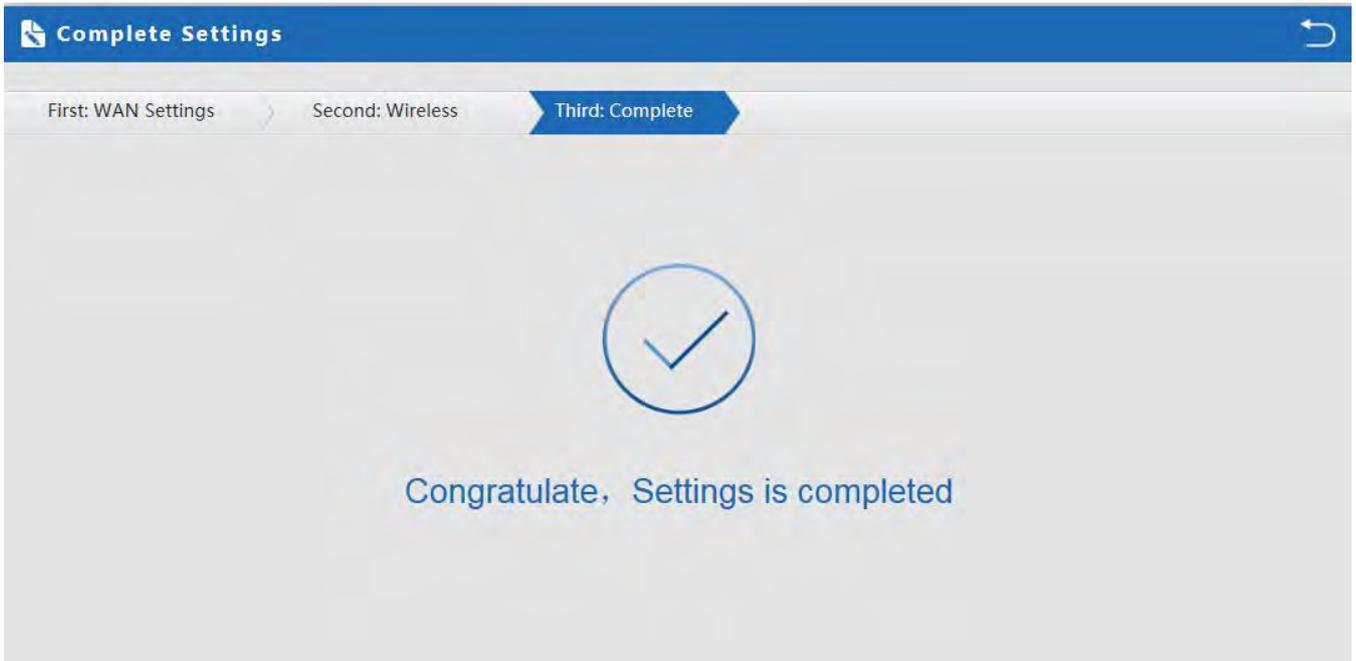

## 2.2.2 WiFi Repeater mode

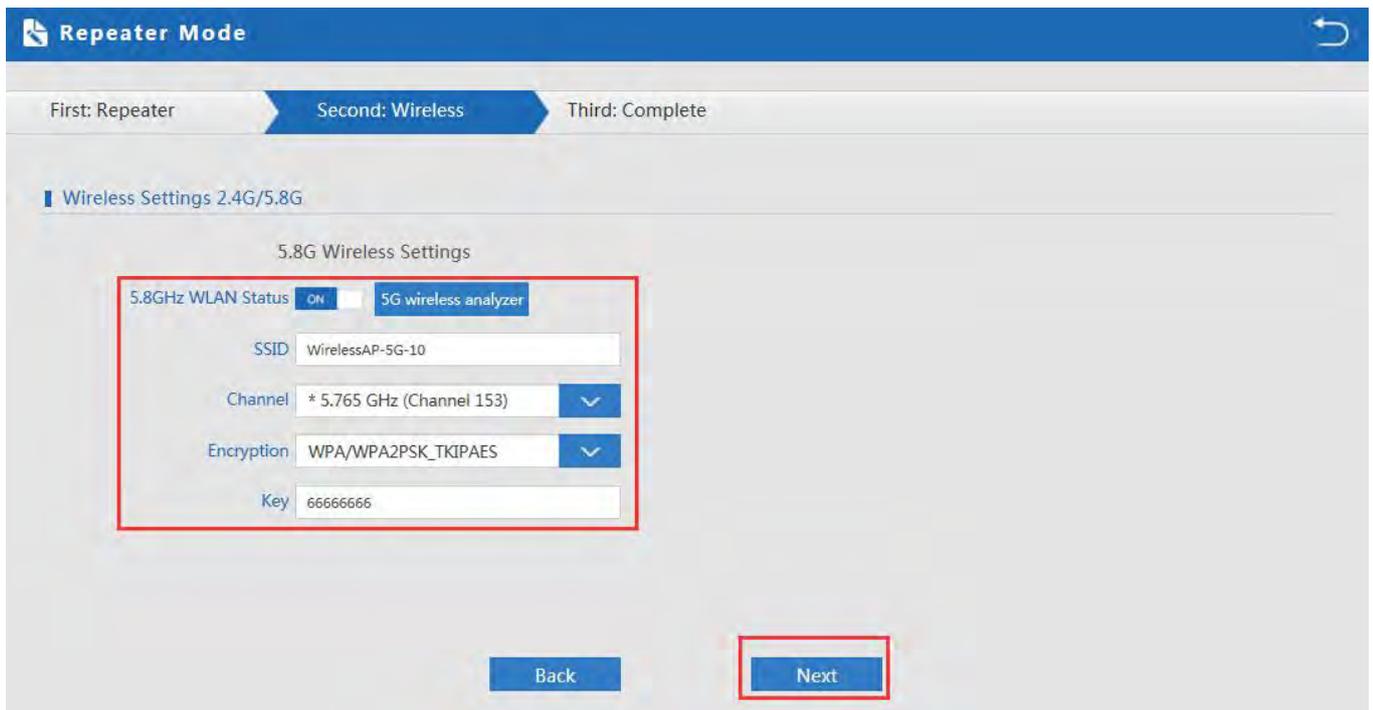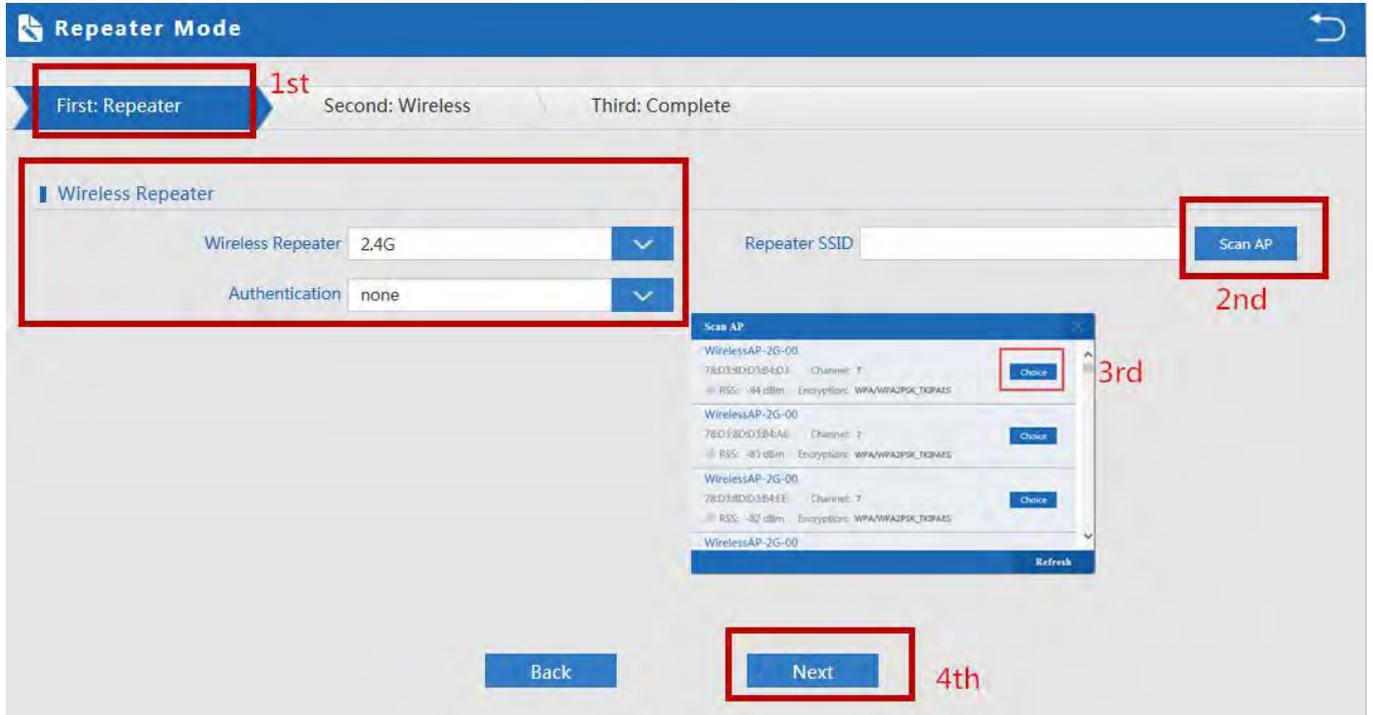

Welcome User Status Wizard Advanced Exit 简体中文 English

Mode Repeater Mode channel 153 Reboot

Running time 2M54S Software Version XD3200-AP-V2.0-Build20151210202321

<p>2.4G Wireless setting</p> <p>2.4G</p> <p>2.4G WLAN off</p>	<p>5.8G Wireless setting</p> <p>5.8G</p> <p>WirelessAP-5G-10 78:D3:8D:D3:B4:62</p>	<p>LAN setting</p> <p>192.168.188.253 78:D3:8D:D3:B4:60</p>	<p>Wireless relay setting</p> <p>Relay connection off</p>
---	--	---	---

**Repeater Mode**

First: Repeater Second: Wireless Third: Complete

Wireless Repeater

Wireless Repeater: 2.4G Repeater SSID:  Scan AP

Authentication: none

Back Next

**WISP Mode**

First: Repeater    Second: WAN    Third: Wireless    Fourth: Complete

**1st**

Wireless Repeater

Wireless Repeater: 2.4G / 5.8G

Authentication: WPA/WPA2PSK\_TKIPAES

2nd

Repeater SSID: WirelessAP-2G-00

3rd

Scan AP

5th

Key: 66666666

4th

Scan AP

WirelessAP-2G-00	78D3-8D03-B94D3	Channel: 7	Choice
WirelessAP-2G-00	78D3-8D03-B94A6	Channel: 7	Choice
WirelessAP-2G-00	78D3-8D03-B94E	Channel: 7	Choice
WirelessAP-2G-00			

Refresh

Back    Next    6th

**WISP Mode**

First: Repeater   **Second: WAN** <sup>1st</sup>   Third: Wireless   Fourth: Complete

Static IP   PPPOE(ADSL)   DHCP <sup>2nd</sup>

The current access mode is DHCP, Please click next to configure.

Back   **Next** <sup>3rd</sup>

**WISP Mode**

First: Repeater   Second: WAN   **Third: Wireless** <sup>1st</sup>   Fourth: Complete

**Wireless Settings 2.4G/5.8G**

5.8G Wireless Settings

5.8GHz WLAN Status  ON  OFF   **5G wireless analyzer**

SSID  <sup>2nd</sup>

Channel

Encryption

Key

Back   **Next** <sup>3rd</sup>

Welcome User      Status    Wizard    Advanced    Exit      简体中文    English

Mode WISP      channel 153      Reboot

Running time 6M45S      Software Version XD3200-AP-V2.0-Build20151210202321

Setting Category	Configuration
Wireless relay setting	Relay connection off
5.8G Wireless setting	WirelessAP-5G-10 78:D3:8D:D3:B4:62
LAN setting	192.168.188.253 78:D3:8D:D3:B4:60
WAN setting	

WAN setting

WAN access mode

- PPPOE(ADSL)
- DHCP**
- Static IP

Apply

AP Mode

First: Wireless

Second : LAN

Third:Complete

Wireless Settings 2.4G/5.8G

2.4G Wireless Settings

2.4GHz WLAN Status  2G wireless analyzer

SSID WirelessAP-2G-00

Channel \* 2.442 GHz (Channel 7)

Encryption WPA/WPA2PSK\_TKIPAES

Key 66666666

5.8G Wireless Settings

5.8GHz WLAN Status  5G wireless analyzer

SSID WirelessAP-5G-10

Channel \* 5.765 GHz (Channel 153)

Encryption WPA/WPA2PSK\_TKIPAES

Key 66666666

Location Information

AP Location

AP Name

Back

Next

AP Mode

First: Wireless

Second : LAN

Third:Complete

LAN setting

Access Type

Static IP  
DHCP

Back

Next

Welcome User Status Wizard Advanced Exit 简体中文 English

Mode AP Mode channel 7 channel 153 Reboot

Running time 2M20S Software Version XD3200-AP-V2.0-Build20151210202321

<p>2.4G Wireless setting</p> <p>WirelessAP-2G-00 78:D3:8D:D3:B4:61</p>	<p>5.8G Wireless setting</p> <p>WirelessAP-5G-10 78:D3:8D:D3:B4:62</p>	<p>LAN setting</p> <p>192.168.188.253 78:D3:8D:D3:B4:60</p>	<p>AP position setting</p>
--	--	---	----------------------------

## Advanced Settings

Return home

Setup Wizard

Device Status

2.4G Wireless

5.8G Wireless

Network

Management

Status 2.4G Wireless Status 5.8G Wireless Status LAN Status

Status

Software Version XD3200-AP-V2.0-Build20151210202321

Hardware Version V5.0

Uptime 6M53S

## Advanced Settings

Return home

Setup Wizard

Device Status

2.4G Wireless

5.8G Wireless

Network

Management

Status 2.4G Wireless Status 5.8G Wireless Status LAN Status

2.4G Wireless Status

2.4G Wireless Status Enable

SSID WirelessAP-2G-00

MAC 78:D3:8D:D3:B4:61

Channel 7

Encryption WPAWPA2\_TKIPAES

Connected Users 0


Client list

The screenshot shows the 'Advanced Settings' page with a sidebar on the left containing 'Return home', 'Setup Wizard', 'Device Status', '2.4G Wireless', '5.8G Wireless', 'Network', and 'Management'. The 'Device Status' menu item is highlighted with a red box. The main content area has tabs for 'Status', '2.4G Wireless Status', '5.8G Wireless Status', and 'LAN Status'. The '5.8G Wireless Status' tab is selected and highlighted with a red box. Below the tab, the '5.8G Wireless Status' section is enclosed in a red box and contains the following information: '5.8G Wireless Status' is 'Enable', 'SSID' is 'WirelessAP-5G-10', 'MAC' is '78:D3:8D:D3:B4:62', 'Channel' is '153', and 'Encryption' is 'WPAWPA2\_TKIPAES'. At the bottom, it shows 'Connected Users' as '0' and a 'Client list' button.


The screenshot shows the 'Advanced Settings' page with the same sidebar as the previous image. The 'Device Status' menu item is highlighted with a red box. The main content area has tabs for 'Status', '2.4G Wireless Status', '5.8G Wireless Status', and 'LAN Status'. The 'LAN Status' tab is selected and highlighted with a red box. Below the tab, the 'LAN Status' section is enclosed in a red box and contains the following information: 'LAN IP' is '192.168.188.253', 'Subnet Mask' is '255.255.255.0', 'MAC' is '78:D3:8D:D3:B4:60', 'Manage server IP' is '192.168.188.1', 'DHCP Status' is 'Disable', and 'DHCP address range' is '192.168.188.2 — 192.168.188.252'. At the bottom, it shows 'Assigned IP' as '0' and a 'Client list' button.

### 2.5.1 Turn off LEDs

Please see below how to turn off LED lights in Accesspoint

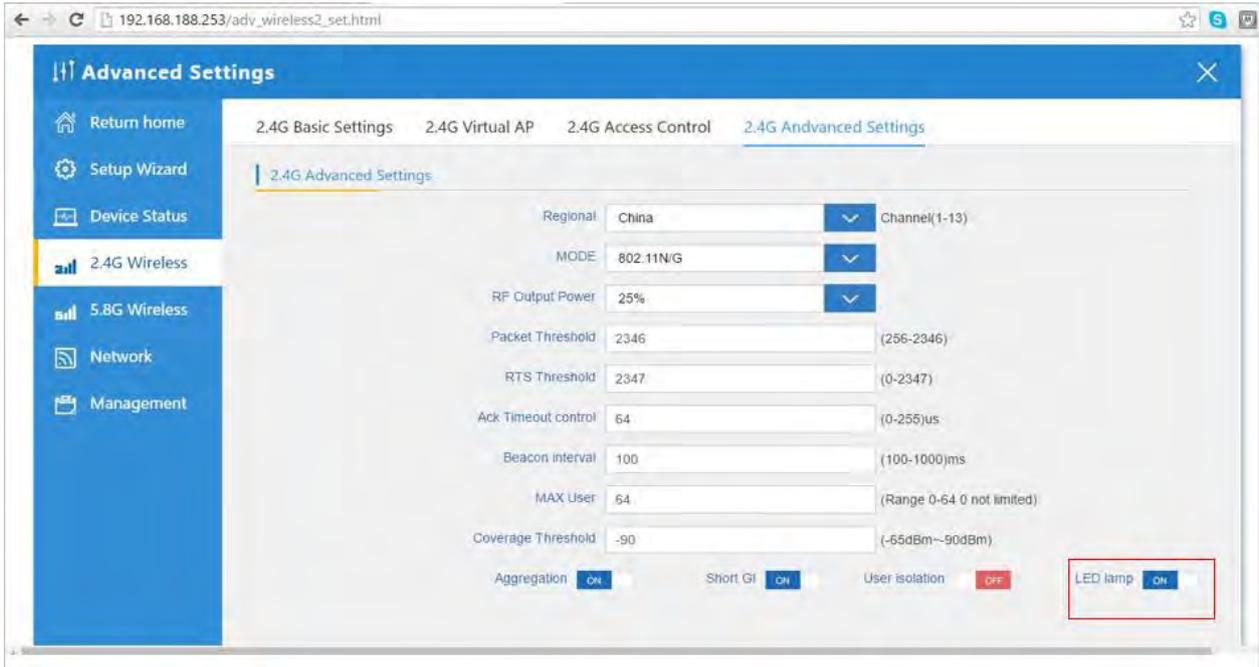


### 2.5.2 2.4G Wireless Setting:

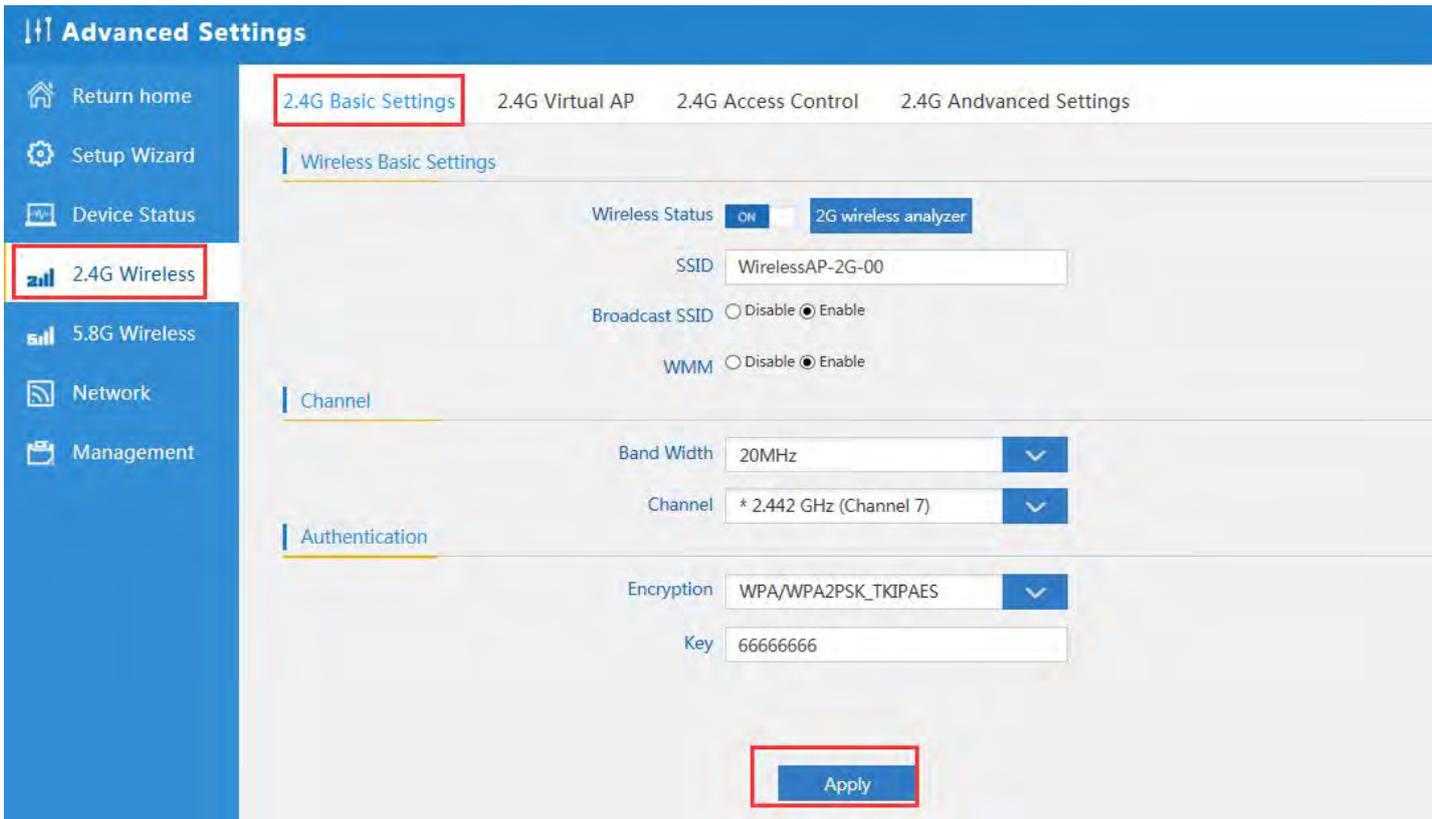


## 2.4Gwifi Channel analysis



### 2.5.3 Virtual AP:

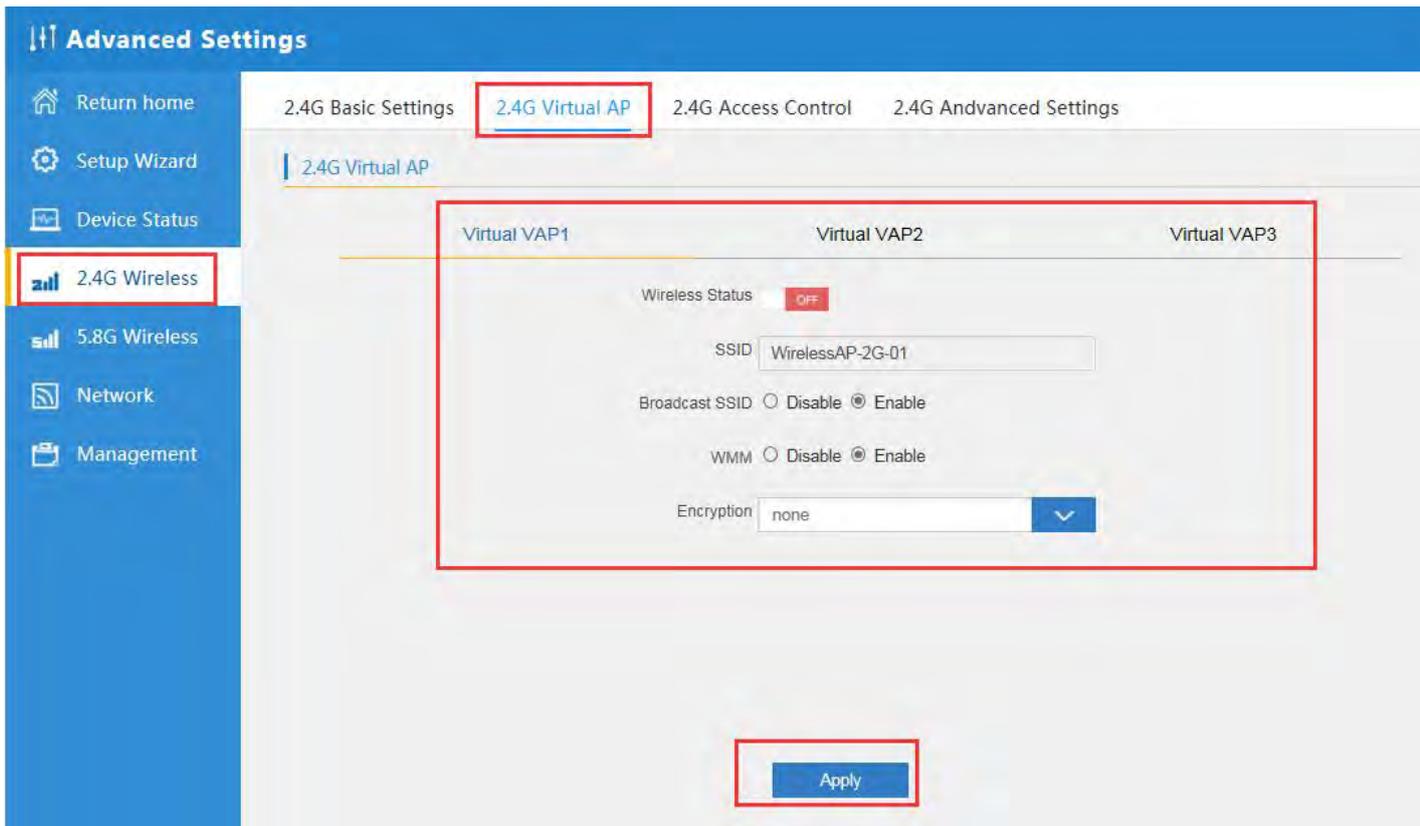

#### 2.5.4 2.4G Access Control:

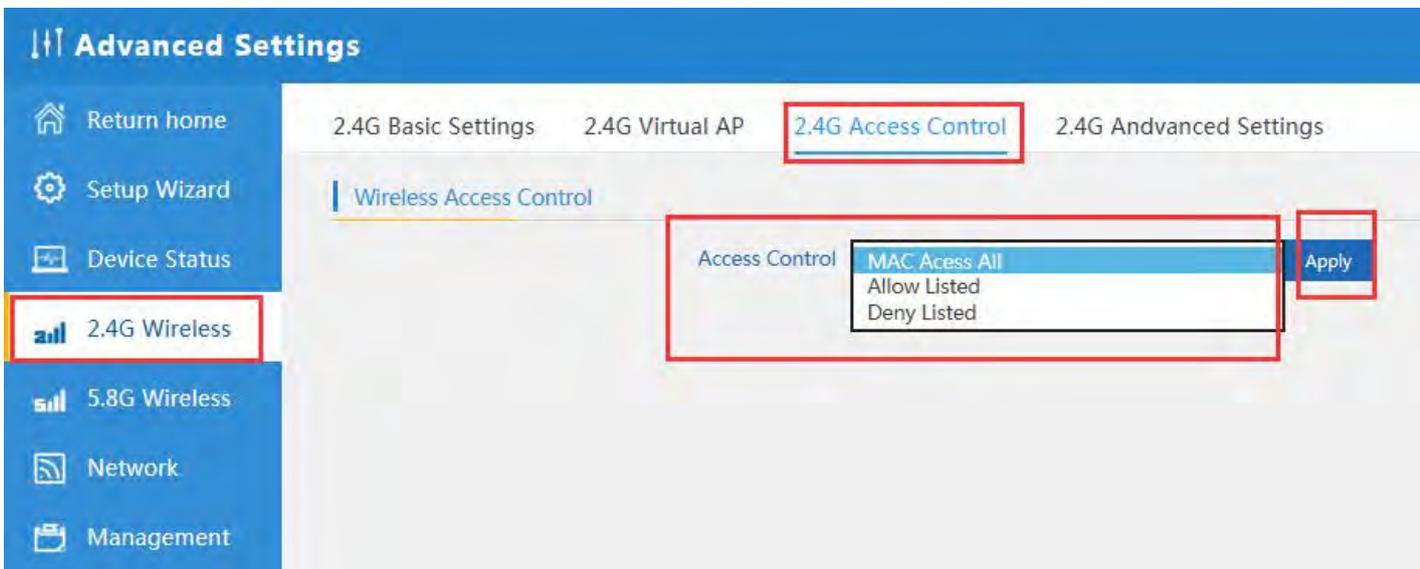

#### 2.5.5 2.4G Advanced Settings:

**Advanced Settings**

- Return home
- Setup Wizard
- Device Status
- 2.4G Wireless**
- 5.8G Wireless
- Network
- Management

2.4G Basic Settings   2.4G Virtual AP   2.4G Access Control   **2.4G Advanced Settings**

2.4G Advanced Settings

Regional	China	▼	Channel(1-13)
MODE	802.11B/G	▼	
RF Output Power	100%	▼	
Packet Threshold	2346		(256-2346)
RTS Threshold	2346		(256-2346)
Ack Timeout control	64		(0-255)us
Beacon interval	100		(100-1000)ms
MAX User	64		(Range 0-64 0 not limited)
Coverage Threshold	-90		(-65dBm~-90dBm)

Aggregation  ON   Short GI  ON   User isolation  OFF

**Apply**

2.5.6 5.8G Wireless Setting:

**Advanced Settings**

- Return home
- Setup Wizard
- Device Status
- 2.4G Wireless
- 5.8G Wireless**
- Network
- Management

5.8G Basic Settings | 5.8G Virtual AP | 5.8G Access Control | 5.8G Advanced Settings

**Wireless Basic Settings**

Wireless Status  ON  OFF [5G wireless analyzer](#)

SSID

Broadcast SSID  Disable  Enable

WMM  Disable  Enable

**Channel**

Band Width

Channel

**Encryption**

Encryption

Key

2.5.7 Network setting:

**Advanced Settings**

- Return home
- Setup Wizard
- Device Status
- 2.4G Wireless
- 5.8G Wireless
- Network**
- Management

LAN Settings | VLAN

LAN Settings

Access Type: Static IP  
DHCP

Apply

**Advanced Settings**

- Return home
- Setup Wizard
- Device Status
- 2.4G Wireless
- 5.8G Wireless
- Network**
- Management

LAN Settings | **VLAN**

VLAN

VLAN-ID(2-4094)	2.4G			5.8G				
	AP	VAP1	VAP2	VAP3	AP	VAP1	VAP2	VAP3
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>							
<input type="text"/>	<input type="checkbox"/>	<input type="checkbox"/>						

## Advanced Settings

- Return home
- Setup Wizard
- Device Status
- 2.4G Wireless
- 5.8G Wireless
- Network
- Management**

System Time   Logs   Upgrade Firmware   System   User

### System Time

System Time 2015-10-30 11:16:34 Sync with host

Choose Time Zone Beijing,Chongqing,Urumqi,Re-Hong Kong,Taiwan; ▼

NTP Server time.windows.com ▼

Equipment timing  Auto restart 23:00 ▼

Apply

## Advanced Settings

- Return home
- Setup Wizard
- Device Status
- 2.4G Wireless
- 5.8G Wireless
- Network
- Management**

System Time   Logs   Upgrade Firmware   System   User

### Upgrade Firmware


Software Version XD3200-AP-V2.0-Build20151210202321

Choose File  Browse Upgrade

Note  do not power off the device during the upload because it may crash the system!

5th

1st

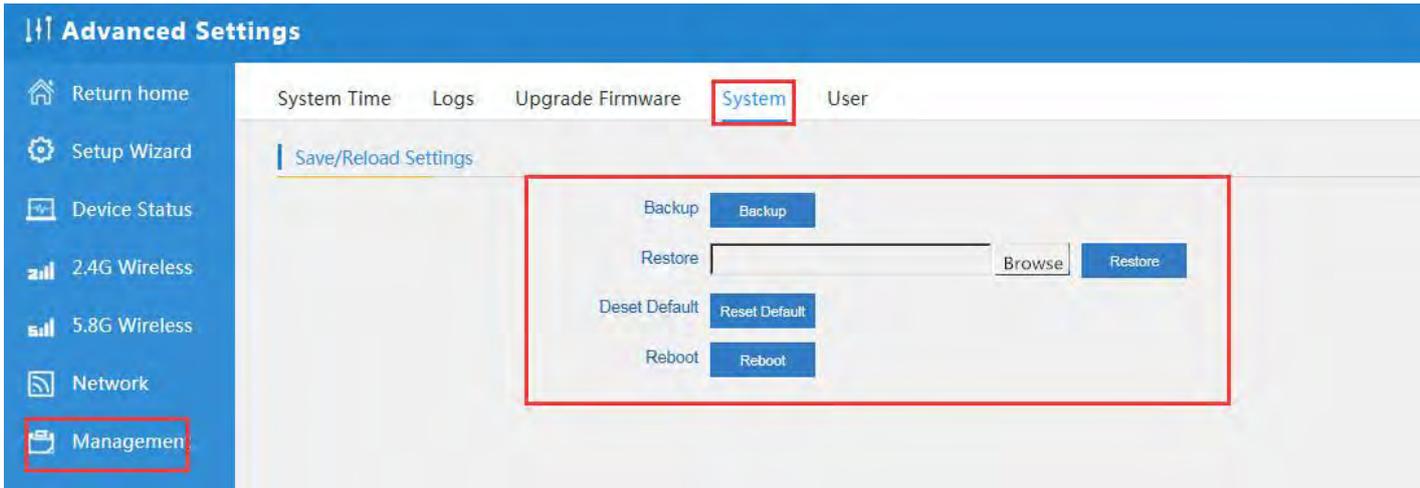

### 3 Share Internet and Obtain IP address automatically

